


***DLS**
LIGHTING

NEWS
2026



EGGER*
LICHT

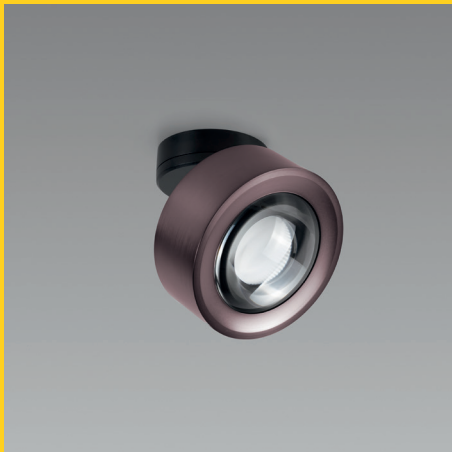

DLS - Design Lighting Selection präsentiert Lichtwerkzeuge, die der Vielzahl der Anforderungen des Lichtplaners entsprechen und für jede Architektur die passende Lichtstimmung schaffen.

Eindeutiges Markenzeichen unserer Produkte ist die Einfachheit und Klarheit in der Form, die Funktionalität und die dauerhafte Qualität. Ausgereifte Technik in schlichtem, formschönem Design in Verbindung mit hoher Lichtqualität schafft eine außergewöhnliche architektonische Raumwirkung und eine spezielle Beleuchtungsatmosphäre.

DLS - eine gelungene Symbiose aus Architektur, Atmosphäre, Design und Innovation.

DLS - Design Lighting Selection presents lighting tools for the multiple needs of lighting designers, offering the best atmosphere of light for every requirement of architecture.

The brand mark of our luminaires is simplicity and formal precision, functionality and lasting quality. Fully developed technique in homespun and shapely design combined with perfect lighting quality creates an exceeding architectural ambiance and a special lighting atmosphere.

DLS is the right symbiosis of architecture, atmosphere, design and innovation.



INDEX

DECKEN- LEUCHTEN CEILING



CLIPPO OPTIC ROYAL 2 CLIPPOOPTICDUOROYAL 4 CLIPPO S AB 6 FRANCIS AB 8 FRANCIS ON 9




CLEO ON 16 ELDORADO 22

WAND- LEUCHTEN WALL



CLIPPO OPTIC ROYAL 2 CLIPPOOPTICDUOROYAL 4 CLIPPO S AB 6 FRANCIS AB 8 FRANCIS ON 9

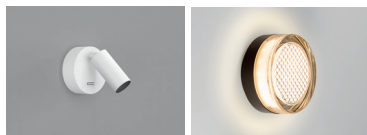

FRANCIS READING 9 ELDORADO 22

HÄNGE- LEUCHTEN SUSPENSION



CLEO MOVE 18 SOLANA 20

SCHIENEN- STRAHLER TRACK



CLIPPO OPTIC ROYAL 2 CLIPPOOPTICDUOROYAL 4 CLEO MOVE 18 SOLANA 20

DECKEN- EINBAU CEILING RECESSED



FRANCIS 10 FRANCIS 68 11 SPHERE 12 SPHERE 68 13 VEGAS 45 14



VEGAS 55 14 FRANCIS IN 15



AUSSEN- LEUCHTEN OUTDOOR



ELDORADO 22 ELDORADO 22 PISA 24 POLO 25

CLIPPO OPTIC ROYAL

LED-Wand- und Deckenstrahler 13 W, CRI>90, mit hochwertigem Reflektor und Glaslinsenoptik, eingebautem Driver 230 V, dimmbar mit Phasenanschnitt-/Phasenabschrittdimmer, Gehäuse aus massivem Aluminium, dreh- und schwenkbar (350°/90°), kompatibel mit CS SYSTEM, Kopfteil wahlweise royal brass, royal bronze, royal gold, royal gun metal oder royal purple

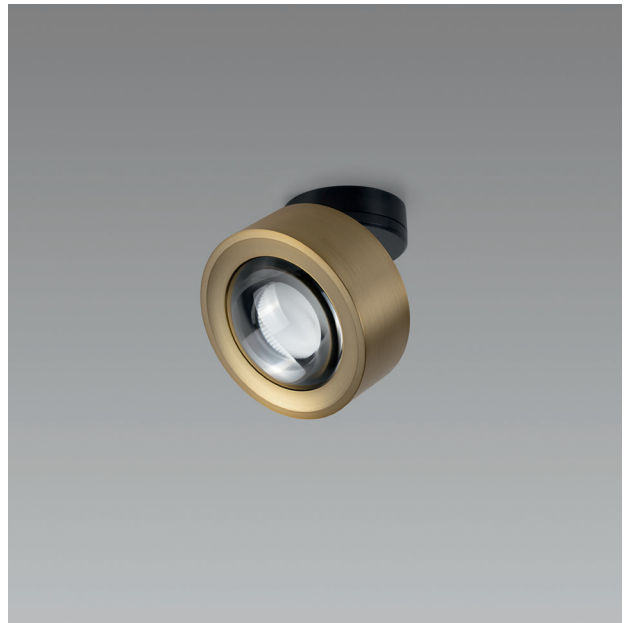

LED-wall and ceiling luminaire 13 W, CRI>90, with high-quality reflector and optical glass lens, built-in driver 230 V, leading edge/trailing edge dimmable, housing made of aluminium, adjustable (350°/90°), compatible with CS SYSTEM, head cover optionally royal brass, royal bronze, royal gold, royal gun metal or royal purple



CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
● D2539	CLIPPO OPTIC ROYAL	royal brass	1x13W LED 36° □ 2700K	1320 lm	incl. driver phase dim
● D2535	CLIPPO OPTIC ROYAL	royal bronze	1x13W LED 36° □ 2700K	1320 lm	incl. driver phase dim
● D2536	CLIPPO OPTIC ROYAL	royal gold	1x13W LED 36° □ 2700K	1320 lm	incl. driver phase dim
● D2537	CLIPPO OPTIC ROYAL	royal gun metal	1x13W LED 36° □ 2700K	1320 lm	incl. driver phase dim
● D2538	CLIPPO OPTIC ROYAL	royal purple	1x13W LED 36° □ 2700K	1320 lm	incl. driver phase dim

Für Montage auf Geräte- und Hohlwanddosen (Ø 68 mm) geeignet / Suitable for mounting on junction boxes (Ø 68 mm)
Ausführung in dim to warm auf Anfrage / Available in dim to warm on request

ACCESSORIES



CODE	TYPE	BEAM ANGLE
DH-D994	REFLECTOR 13 W LED	15°
DH-D996	REFLECTOR 13 W LED	48°



Diffusorfolie für CLIPPO OPTIC ROYAL (P3)
Diffuser foil for CLIPPO OPTIC ROYAL (P3)

CODE	TYPE	COLOUR
DH-D988	FOLIE / FOIL	-



COLOURS



royal brass

royal bronze

royal gold


royal gun metal

royal purple

VARIANTS



Siehe DLS Katalog 7 oder dlsighting.com / See the DLS Catalog 7 or visit dlsighting.com

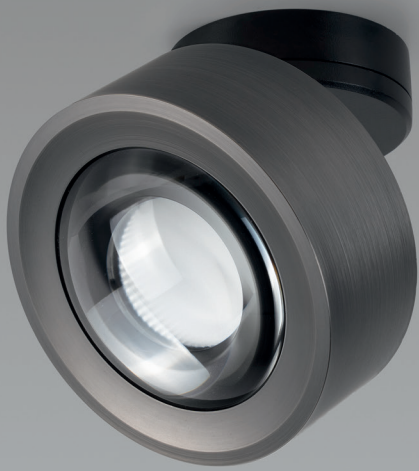


royal gun metal




royal purple



royal brass

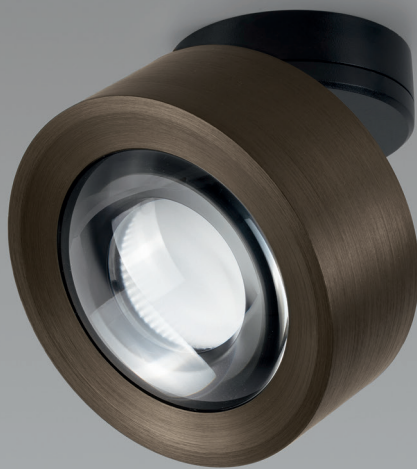


royal bronze

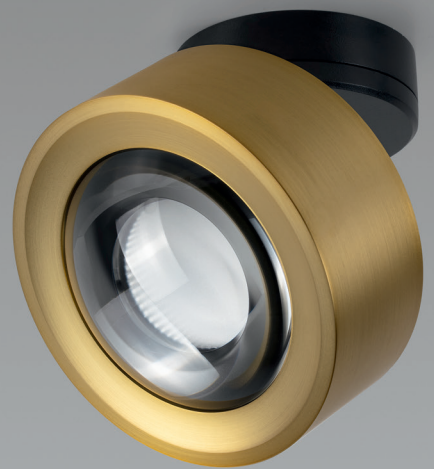

royal gold

CLIPPO OPTIC DUO ROYAL

LED-Wand- und Deckenstrahler 2 x 13 W, CRI>90, mit hochwertigem Reflektor und Glaslinsenoptik, eingebautem Driver 230 V, dimmbar mit Phasenanschnitt-/ Phasenabschrittdimmer, Gehäuse aus massivem Aluminium, dreh- und schwenkbar (350°/90°), Kopfteil wahlweise royal brass, royal bronze, royal gold, royal gun metal oder royal purple



LED-wall and ceiling luminaire 2 x 13 W, CRI>90, with high-quality reflector and optical glass lens, built-in driver 230 V, leading edge/trailing edge dimmable, housing made of aluminium, adjustable (350°/90°), head cover optionally royal brass, royal bronze, royal gold, royal gun metal or royal purple



CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
● D2549	CLIPPO OPTIC DUO ROYAL	royal brass	2x13W LED 36° 2700K	2x1320 lm	incl. driver phase dim
● D2545	CLIPPO OPTIC DUO ROYAL	royal bronze	2x13W LED 36° 2700K	2x1320 lm	incl. driver phase dim
● D2546	CLIPPO OPTIC DUO ROYAL	royal gold	2x13W LED 36° 2700K	2x1320 lm	incl. driver phase dim
● D2547	CLIPPO OPTIC DUO ROYAL	royal gun metal	2x13W LED 36° 2700K	2x1320 lm	incl. driver phase dim
○ D2548	CLIPPO OPTIC DUO ROYAL	royal purple	2x13W LED 36° 2700K	2x1320 lm	incl. driver phase dim

Ausführung in dim to warm auf Anfrage / Available in dim to warm on request

ACCESSORIES



CODE	TYPE	BEAM ANGLE
DH-D994	REFLECTOR 13 W LED	15°
DH-D996	REFLECTOR 13 W LED	48°



Diffusorfolie für CLIPPO OPTIC DUO ROYAL (P3)
Diffuser foil for CLIPPO OPTIC DUO ROYAL (P3)

CODE	TYPE	COLOUR
DH-D988	FOLIE / FOIL	-



COLOURS



royal brass

royal bronze

royal gold

royal gun metal

royal purple

VARIANTS



Siehe DLS Katalog 7 oder dlsighting.com / See the DLS Catalog 7 or visit dlsighting.com



Archiguards / Foto: MW-Architekturfotografie




The Black Square



Sil.K. Innenarchitektur

CLIPPO S AB

LED-Wand- und Deckenstrahler für externen Driver 9,3 W, bzw. 9,5 W, CRI>90, mit hochwertigem Reflektor, auch für Montage auf Geräte- und Hohlwanddosen (Ø 68 mm) geeignet, Gehäuse aus massivem Aluminium, dreh- und schwenkbar (350°/90°), Entblendungsring (werkzeuglos tauschbar) wahlweise gold, schwarz oder weiß, Driver bitte separat bestellen




LED-wall and ceiling luminaire for external driver 9,3 W or 9,5 W, CRI>90, with high-quality reflector, also suitable for mounting on junction boxes (Ø 68 mm), housing made of aluminium, adjustable (350°/90°), anti glare ring (exchangeable without tools) optionally gold, black or white, please order driver separately



	CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
⊕	D2506	CLIPPO S AB	white/white	1x9,5W LED 34° dtw 1800K-3000K 500mA	45-915 lm	excl. driver
⊕	D2507	CLIPPO S AB	white/gold	1x9,5W LED 34° dtw 1800K-3000K 500mA	45-915 lm	excl. driver
●	D2508	CLIPPO S AB	black/black	1x9,5W LED 34° dtw 1800K-3000K 500mA	45-915 lm	excl. driver
●	D2509	CLIPPO S AB	black/gold	1x9,5W LED 34° dtw 1800K-3000K 500mA	45-915 lm	excl. driver
⊕	D2510	CLIPPO S AB	white/white	1x9,3W LED 34° 2700K 500mA	1100 lm	excl. driver
⊕	D2511	CLIPPO S AB	white/gold	1x9,3W LED 34° 2700K 500mA	1100 lm	excl. driver
●	D2512	CLIPPO S AB	black/black	1x9,3W LED 34° 2700K 500mA	1100 lm	excl. driver
●	D2513	CLIPPO S AB	black/gold	1x9,3W LED 34° 2700K 500mA	1100 lm	excl. driver


dtw = dim to warm 1800K - 3000K

ACCESSORIES



CODE	TYPE	BEAM ANGLE	COLOUR
DH-D338	REFLECTOR 9,5 LED	24°	-
DH-D345	REFLECTOR 9,5 LED	46°	-
DH-D301	REFLECTOR 9,3 LED	24°	-
DH-D303	REFLECTOR 9,3 LED	48°	-
D147	WABENRASTER / HONEY COMP LOUVER	-	-

COLOURS

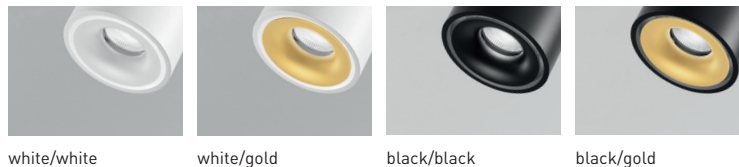

white/white

white/gold

black/black

black/gold

Driver



Driver siehe dlsighting.com / Driver see dlsighting.com



Foto: Christoph Panzer




TM-Architektur / Foto: Manfred Seidl

FRANCIS AB

LED-Strahler 6,2 W, 9 V, CRI>95, Gehäuse aus Aluminiumdruckguss, dreh- und schwenkbar (350°/90°), Entblendungsring wahlweise gold oder schwarz, Driver bitte separat bestellen


LED-luminaire 6,2 W, 9 V, CRI>95, made of die-cast aluminium, adjustable (350°/90°), anti glare ring optionally gold or black, please order driver separately

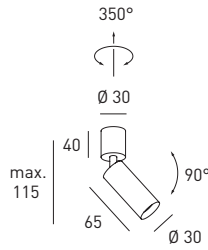

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
● D2110-__	FRANCIS AB	white/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2111-__	FRANCIS AB	white/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2112-__	FRANCIS AB	black/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2113-__	FRANCIS AB	black/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2114-__	FRANCIS AB	brass/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2594-__	FRANCIS AB	gun metal/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2115-__	FRANCIS AB	white/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2116-__	FRANCIS AB	white/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2117-__	FRANCIS AB	black/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2118-__	FRANCIS AB	black/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2119-__	FRANCIS AB	brass/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2595-__	FRANCIS AB	gun metal/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver

Driver siehe dslighting.com / Driver see dslighting.com

COLOURS

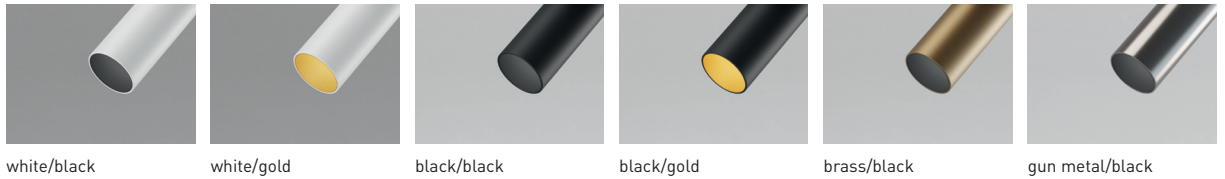

ACCESSORIES




CODE	TYPE	COLOUR
D196	HONEY COMB LOUVER	black



FRANCIS ON

LED-Strahler 6,2 W, CRI>95, mit eingebautem Driver 230 V, dimmbar mit Phasenabschrittdimmer, Gehäuse aus Aluminiumdruckguss, dreh- und schwenkbar (350°/90°), Entblendungsring wahlweise gold oder schwarz

LED-luminaire 6,2 W, CRI>95, with built-in driver 230 V, trailing edge dimmable, made of die-cast aluminium, adjustable (350°/90°), anti glare ring optionally gold or black

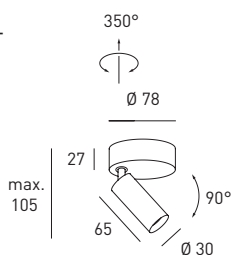

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
● D2600-__	FRANCIS ON	white/black	1x6,2W LED □ 2700K	830 lm	incl. driver phase dim
● D2601-__	FRANCIS ON	white/gold	1x6,2W LED □ 2700K	830 lm	incl. driver phase dim
● D2602-__	FRANCIS ON	black/black	1x6,2W LED □ 2700K	830 lm	incl. driver phase dim
● D2603-__	FRANCIS ON	black/gold	1x6,2W LED □ 2700K	830 lm	incl. driver phase dim
● D2604-__	FRANCIS ON	brass/black	1x6,2W LED □ 2700K	830 lm	incl. driver phase dim
● D2596-__	FRANCIS ON	gun metal/black	1x6,2W LED □ 2700K	830 lm	incl. driver phase dim
● D2605-__	FRANCIS ON	white/black	1x6,2W LED □ 3000K	870 lm	incl. driver phase dim
● D2606-__	FRANCIS ON	white/gold	1x6,2W LED □ 3000K	870 lm	incl. driver phase dim
● D2607-__	FRANCIS ON	black/black	1x6,2W LED □ 3000K	870 lm	incl. driver phase dim
● D2608-__	FRANCIS ON	black/gold	1x6,2W LED □ 3000K	870 lm	incl. driver phase dim
● D2609-__	FRANCIS ON	brass/black	1x6,2W LED □ 3000K	870 lm	incl. driver phase dim
● D2597-__	FRANCIS ON	gun metal/black	1x6,2W LED □ 3000K	870 lm	incl. driver phase dim

REFLECTOR




CODE	TYPE	BEAM ANGLE
Dxxxx-15	REFLECTOR	15°
Dxxxx-36	REFLECTOR	36° (standard)
Dxxxx-50	REFLECTOR	50°

FRANCIS READING

LED-Leuchte 4,5 W, CRI>95, Aufbaugeschäse mit eingebautem Driver 230 V und Wippschalter, Gehäuse aus Aluminiumdruckguss, dreh- und schwenkbar (350°/90°), Entblendungsring wahlweise gold oder schwarz

LED-fixture 4,5 W, CRI>95, surface mounted with built-in driver 230 V including rocker switch, made of die-cast aluminium, adjustable (350°/90°), anti glare ring optionally gold or black

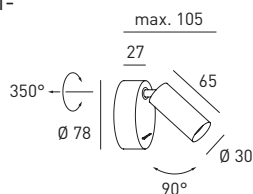


CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
● D2610	FRANCIS READING	white/black	1x4,5W LED 36° □ 2700K	580 lm	incl. driver
● D2611	FRANCIS READING	white/gold	1x4,5W LED 36° □ 2700K	580 lm	incl. driver
● D2612	FRANCIS READING	black/black	1x4,5W LED 36° □ 2700K	580 lm	incl. driver
● D2613	FRANCIS READING	black/gold	1x4,5W LED 36° □ 2700K	580 lm	incl. driver
● D2614	FRANCIS READING	brass/black	1x4,5W LED 36° □ 2700K	580 lm	incl. driver
● D2598	FRANCIS READING	gun metal/black	1x4,5W LED 36° □ 2700K	580 lm	incl. driver
● D2615	FRANCIS READING	white/black	1x4,5W LED 36° □ 3000K	610 lm	incl. driver
● D2616	FRANCIS READING	white/gold	1x4,5W LED 36° □ 3000K	610 lm	incl. driver
● D2617	FRANCIS READING	black/black	1x4,5W LED 36° □ 3000K	610 lm	incl. driver
● D2618	FRANCIS READING	black/gold	1x4,5W LED 36° □ 3000K	610 lm	incl. driver
● D2619	FRANCIS READING	brass/black	1x4,5W LED 36° □ 3000K	610 lm	incl. driver
● D2599	FRANCIS READING	gun metal/black	1x4,5W LED 36° □ 3000K	610 lm	incl. driver

FRANCIS

LED-Halbeinbaustrahler 6,2 W, 9 V, CRI>95, Gehäuse aus Aluminiumdruckguss, dreh- und schwenkbar (350°/90°), Entblendungsring wahlweise gold oder schwarz, Driver bitte separat bestellen

LED-recessed luminaire 6,2 W, 9 V, CRI>95, made of die-cast aluminium, adjustable (350°/90°), anti glare ring optionally gold or black, please order driver separately

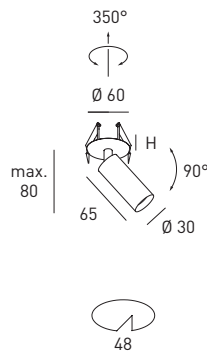

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY	H
● D2100-__	FRANCIS	white/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2101-__	FRANCIS	white/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2102-__	FRANCIS	black/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2103-__	FRANCIS	black/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2104-__	FRANCIS	brass/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2590-__	FRANCIS	gun metal/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2105-__	FRANCIS	white/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
● D2106-__	FRANCIS	white/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
● D2107-__	FRANCIS	black/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
● D2108-__	FRANCIS	black/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
● D2109-__	FRANCIS	brass/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
● D2591-__	FRANCIS	gun metal/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm


H = Einbautiefe / Mounting depth



FRANCIS 68

LED-Halbeinbaustrahler 6,2 W, 9 V, CRI>95, auch für die Montage auf Geräte- und Hohlwanddosen (Ø 68 mm) geeignet, Gehäuse aus Aluminiumdruckguss, dreh- und schwenkbar (350°/90°), Entblendungsring wahlweise gold oder schwarz, Driver bitte separat bestellen

LED-recessed luminaire 6,2 W, 9 V, CRI>95, also suitable for mounting on junction boxes (Ø 68 mm), made of die-cast aluminium, adjustable (350°/90°), anti glare ring optionally gold or black, please order driver separately

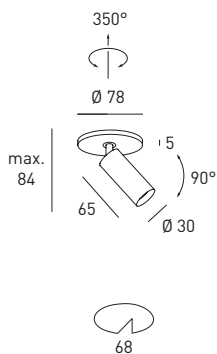

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
① D2670-__	FRANCIS 68	white/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
② D2671-__	FRANCIS 68	white/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2672-__	FRANCIS 68	black/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2673-__	FRANCIS 68	black/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2674-__	FRANCIS 68	brass/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2592-__	FRANCIS 68	gun metal/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
① D2675-__	FRANCIS 68	white/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
② D2676-__	FRANCIS 68	white/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2677-__	FRANCIS 68	black/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2678-__	FRANCIS 68	black/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2679-__	FRANCIS 68	brass/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2593-__	FRANCIS 68	gun metal/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver

MOUNTING Decke / Wand Wall / Ceiling




Montage auf Geräte- und Hohlwanddosen (Ø 68 mm) / Mounting on junction boxes (Ø 68 mm)

REFLECTOR



CODE	TYPE	BEAM ANGLE
Dxxx-15	REFLECTOR	15°
Dxxx-36	REFLECTOR	36° (standard)
Dxxx-50	REFLECTOR	50°

COLOURS

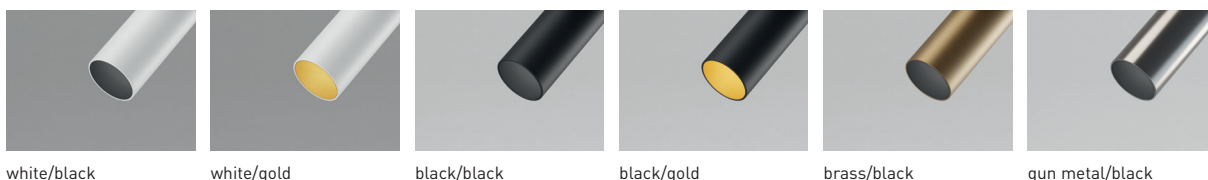

ACCESSORIES



CODE	TYPE	COLOUR
D196	HONEY COMB LOUVER	black

Driver




Driver siehe dtslighting.com / Driver see dtslighting.com

SPHERE

LED-Halbeinbaustrahler 6,2 W, 9 V, CRI>95, Gehäuse aus massivem Aluminium, dreh- und schwenkbar (350°/90°), wahlweise gold, schwarz oder weiß, Driver bitte separat bestellen

LED-recessed luminaire 6,2 W, 9 V, CRI>95, housing made of aluminium, adjustable (350°/90°), optionally black, gold or white, please order driver separately

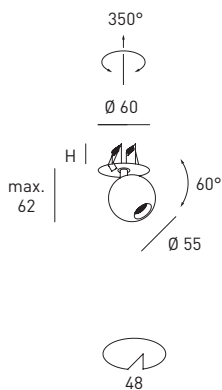

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY	H
⊕ D2680- ---	SPHERE	white/white	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
⊕ D2681- ---	SPHERE	white/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2682- ---	SPHERE	black/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
● D2683- ---	SPHERE	black/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver	50 mm
⊕ D2685- ---	SPHERE	white/white	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
⊕ D2686- ---	SPHERE	white/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
● D2687- ---	SPHERE	black/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm
● D2688- ---	SPHERE	black/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver	50 mm


H = Einbautiefe / Mounting depth



SPHERE 68

LED-Halbeinbaustrahler 6,2 W, 9 V, CRI>95, auch für Montage auf Geräte- und Hohlwanddosen (Ø 68 mm) geeignet, Gehäuse aus massivem Aluminium, dreh- und schwenkbar (350°/90°), wahlweise gold, schwarz oder weiß, Driver bitte separat bestellen

LED-recessed luminaire 6,2 W, 9 V, CRI>95, also suitable for mounting on junction boxes (Ø 68 mm), housing made of aluminium, adjustable (350°/90°), optionally black, gold or white, please order driver separately

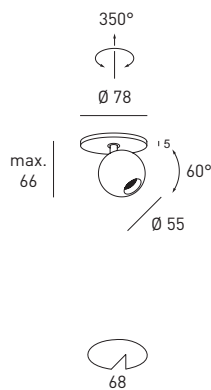

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
⓪ D2690-__	SPHERE 68	white/white	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
⓪ D2691-__	SPHERE 68	white/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2692-__	SPHERE 68	black/black	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
● D2693-__	SPHERE 68	black/gold	1x6,2W LED □ 2700K 700mA	830 lm	excl. driver
⓪ D2695-__	SPHERE 68	white/white	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
⓪ D2696-__	SPHERE 68	white/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2697-__	SPHERE 68	black/black	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver
● D2698-__	SPHERE 68	black/gold	1x6,2W LED □ 3000K 700mA	870 lm	excl. driver

MOUNTING

Decke / Wand
Wall / Ceiling




Montage auf Geräte- und Hohlwanddosen (Ø 68 mm) / Mounting on junction boxes (Ø 68 mm)

REFLECTOR



CODE	TYPE	BEAM ANGLE
Dxxxx-15	REFLECTOR	15°
Dxxxx-36	REFLECTOR	36° (standard)
Dxxxx-50	REFLECTOR	50°

COLOURS

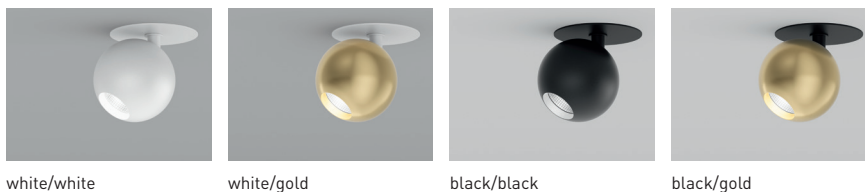

white/white

white/gold

black/black

black/gold

Driver





Driver siehe dslighting.com / Driver see dslighting.com

VEGAS 45

LED-Einbaustrahler 6 W, 36 V, CRI>90, aus Aluminium, mit hochwertiger, tiefer gesetzter Linsenoptik, extra flache Bauform, dreh- und schwenkbar (360°/22°), Akzentring wahlweise schwarz oder weiß, Driver bitte separat bestellen

LED-recessed downlight 6 W, 36 V, CRI>90, made of aluminium, with recessed, high value optical lens, special flat design, adjustable (360°/22°), accent ring optionally black or white, please order driver separately

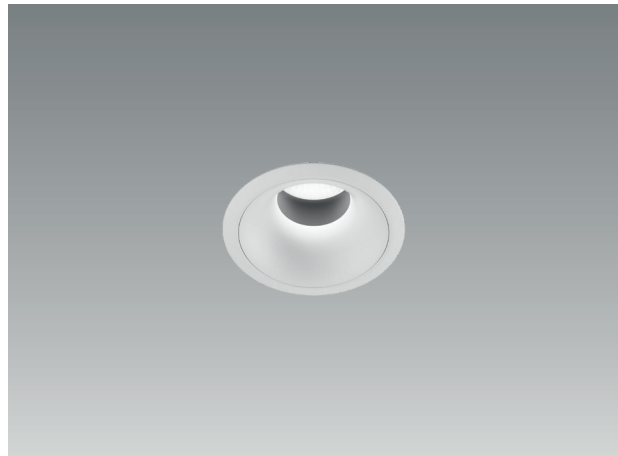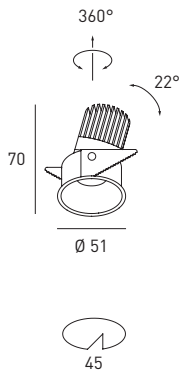

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY	H
① D2650-__	VEGAS 45	white/white	1x6W LED □ 2700K 150mA	580 lm	excl. driver	70 mm
① D2651-__	VEGAS 45	white/black	1x6W LED □ 2700K 150mA	580 lm	excl. driver	70 mm
① D2653-__	VEGAS 45	black/white	1x6W LED □ 2700K 150mA	580 lm	excl. driver	70 mm
● D2654-__	VEGAS 45	black/black	1x6W LED □ 2700K 150mA	580 lm	excl. driver	70 mm

H = Einbautiefe / **Zusätzlich erforderliche Einbautiefe bei eingebautem Driver: 20 mm**
H = Mounting depth / **Additional required installation depth with the driver installed: 20 mm**

REFLECTOR




CODE	TYPE	BEAM ANGLE
Dxxx-22	REFLECTOR	22°
Dxxx-30	REFLECTOR	30° (standard)
Dxxx-43	REFLECTOR	43°

VEGAS 55

LED-Einbaustrahler 9 W, 36 V, CRI>90, aus Aluminium, mit hochwertiger, tiefer gesetzter Linsenoptik, extra flache Bauform, dreh- und schwenkbar (360°/22°), Akzentring wahlweise schwarz oder weiß, Driver bitte separat bestellen

LED-recessed downlight 9 W, 36 V, CRI>90, made of aluminium, with recessed, high value optical lens, special flat design, adjustable (360°/22°), accent ring optionally black or white, please order driver separately

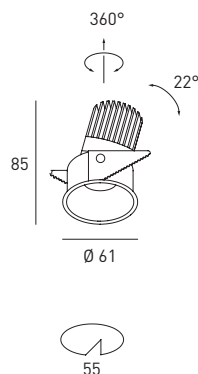

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY	H
① D2660-__	VEGAS 55	white/white	1x9W LED □ 2700K 200mA	850 lm	excl. driver	85 mm
① D2661-__	VEGAS 55	white/black	1x9W LED □ 2700K 200mA	850 lm	excl. driver	85 mm
① D2663-__	VEGAS 55	black/white	1x9W LED □ 2700K 200mA	850 lm	excl. driver	85 mm
● D2664-__	VEGAS 55	black/black	1x9W LED □ 2700K 200mA	850 lm	excl. driver	85 mm

H = Einbautiefe / Mounting depth

REFLECTOR



CODE	TYPE	BEAM ANGLE
Dxxx-22	REFLECTOR	22°
Dxxx-32	REFLECTOR	32° (standard)
Dxxx-45	REFLECTOR	45°

COLOURS



white/white

white/black

black/white

black/black



Driver



Driver siehe dlsighting.com / Driver see dlsighting.com

FRANCIS IN

LED-Einbaustrahler 5,3 W, 9 V, CRI>95, Gehäuse aus Aluminiumdruckguss, mit hochwertiger, tiefer gesetzter Linsenoptik, Entblendungsring wahlweise gold oder schwarz, Driver bitte separat bestellen

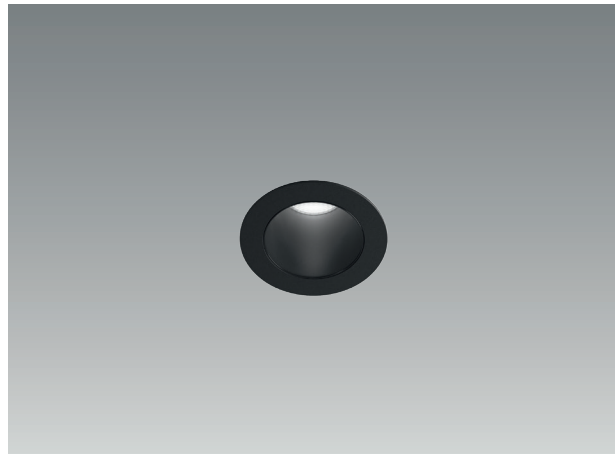

LED-recessed downlight 5,3 W, 9 V, CRI>95, made of die-cast aluminium, with recessed, high value optical lens, anti glare ring optionally gold or black, please order driver separately



CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY	H
① D2631-__	FRANCIS IN	white/black	1x5,3W LED 36° □ 2700K 600mA	710 lm	excl. driver	75 mm
② D2632-__	FRANCIS IN	white/gold	1x5,3W LED 36° □ 2700K 600mA	710 lm	excl. driver	75 mm
● D2634-__	FRANCIS IN	black/black	1x5,3W LED 36° □ 2700K 600mA	710 lm	excl. driver	75 mm
● D2635-__	FRANCIS IN	black/gold	1x5,3W LED 36° □ 2700K 600mA	710 lm	excl. driver	75 mm
① D2637-__	FRANCIS IN	white/black	1x5,3W LED 36° □ 3000K 600mA	740 lm	excl. driver	75 mm
② D2638-__	FRANCIS IN	white/gold	1x5,3W LED 36° □ 3000K 600mA	740 lm	excl. driver	75 mm
● D2640-__	FRANCIS IN	black/black	1x5,3W LED 36° □ 3000K 600mA	740 lm	excl. driver	75 mm
● D2641-__	FRANCIS IN	black/gold	1x5,3W LED 36° □ 3000K 600mA	740 lm	excl. driver	75 mm

H = Einbautiefe / **Zusätzlich erforderliche Einbautiefe bei eingebautem Driver: 20 mm**
 H = Mounting depth / **Additional required installation depth with the driver installed: 20 mm**

REFLECTOR



CODE	TYPE	BEAM ANGLE
Dxxxx-15	REFLECTOR	15°
Dxxxx-36	REFLECTOR	36° (standard)
Dxxxx-50	REFLECTOR	50°

COLOURS



white/black

white/gold


black/black

black/gold



CLEO ON

LED-Deckenleuchte 7 W,
mit hochwertiger Glasoptik,
mit eingebautem Driver
230 V, dimmbar mit Pha-
senanschnitt-/Phasenab-
schnittdimmer, Gehäuse aus
massivem Aluminium



LED-ceiling luminaire 7 W,
with high-quality glass lens,
with built-in driver 230 V,
leading edge/trailing edge
dimmable, housing made of
aluminium



CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
○ D2700	CLEO ON	white	1x7W LED □ 2700K	660 lm	incl. driver phase dim
● D2701	CLEO ON	black	1x7W LED □ 2700K	660 lm	incl. driver phase dim
● D2702	CLEO ON	brass	1x7W LED □ 2700K	660 lm	incl. driver phase dim
⦿ D2703	CLEO ON	white/brass	1x7W LED □ 2700K	660 lm	incl. driver phase dim
● D2704	CLEO ON	black/brass	1x7W LED □ 2700K	660 lm	incl. driver phase dim
○ D2705	CLEO ON	white	1x7W LED □ 3000K	700 lm	incl. driver phase dim
● D2706	CLEO ON	black	1x7W LED □ 3000K	700 lm	incl. driver phase dim
● D2707	CLEO ON	brass	1x7W LED □ 3000K	700 lm	incl. driver phase dim
⦿ D2708	CLEO ON	white/brass	1x7W LED □ 3000K	700 lm	incl. driver phase dim
● D2709	CLEO ON	black/brass	1x7W LED □ 3000K	700 lm	incl. driver phase dim

COLOURS



white



black



brass



white/brass




black/brass



CLEO MOVE


LED-Hängeleuchte 7 W, Höhe von 450 mm bis 2370 mm stufenlos verstellbar, mit hochwertiger Glasoptik, mit eingebautem Driver 230 V, dimmbar mit Phasenanschnitt-/Phasenabschnittdimmer, Gehäuse aus massivem Aluminium, kompatibel mit CS SYSTEM

LED-pendant 7 W, height from 450 mm to 2370 mm infinitely adjustable, with high-quality glass lens, with built-in driver 230 V, leading edge/trailing edge dimmable, housing made of aluminium, compatible with CS SYSTEM

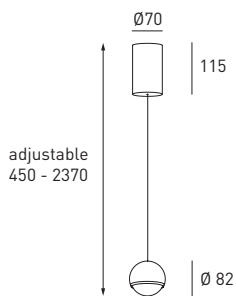

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
○ D2710	CLEO MOVE	white	1x7W LED □ 2700K	660 lm	incl. driver phase dim
● D2711	CLEO MOVE	black	1x7W LED □ 2700K	660 lm	incl. driver phase dim
● D2712	CLEO MOVE	brass	1x7W LED □ 2700K	660 lm	incl. driver phase dim
○ D2713	CLEO MOVE	white/brass	1x7W LED □ 2700K	660 lm	incl. driver phase dim
● D2714	CLEO MOVE	black/brass	1x7W LED □ 2700K	660 lm	incl. driver phase dim
○ D2715	CLEO MOVE	white	1x7W LED □ 3000K	700 lm	incl. driver phase dim
● D2716	CLEO MOVE	black	1x7W LED □ 3000K	700 lm	incl. driver phase dim
● D2717	CLEO MOVE	brass	1x7W LED □ 3000K	700 lm	incl. driver phase dim
○ D2718	CLEO MOVE	white/brass	1x7W LED □ 3000K	700 lm	incl. driver phase dim
● D2719	CLEO MOVE	black/brass	1x7W LED □ 3000K	700 lm	incl. driver phase dim

COLOURS

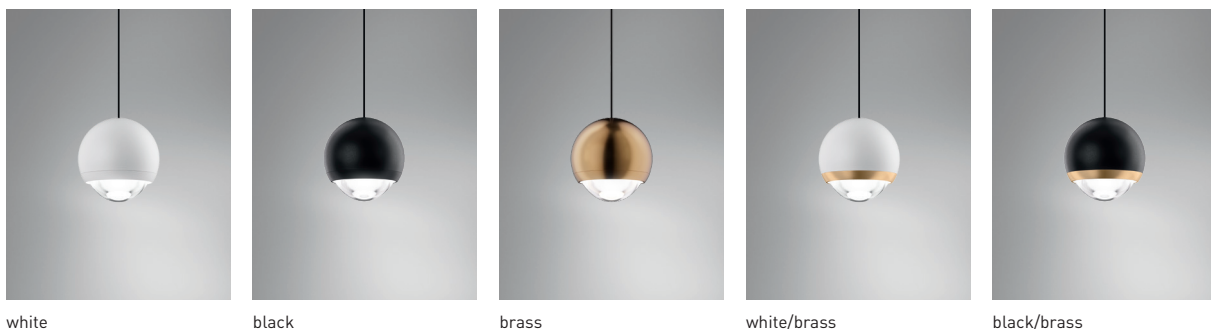

white

black

brass

white/brass

black/brass

TRACK

Optional mit Global 1-Phasenadapter oder 3-Phasen-Universaladapter
Optionally with Global 1-phase adapter or 3-phase universal adapter


CODE	TYPE
Dxxxx-P1	Global 1-phase adapter
Dxxxx-P3	3-phase universal adapter



SOLANA

LED-Hängeleuchte 11 W, CRI>90, Höhe von 450 mm bis 2370 mm stufenlos verstellbar, Entblendung durch mikroprismatische Abdeckung, mit eingebautem Driver 230 V, dimmbar mit Phasenabschrittdimmer, Gehäuse aus massivem Aluminium, kompatibel mit CS SYSTEM, Akzentring wahlweise gold, messing, schwarz oder weiß

LED-pendant 11 W, CRI>90, height from 450 mm to 2370 mm infinitely adjustable, glare suppression through microprismatic cover, with built-in driver 230 V, trailing edge dimmable, housing made of aluminium, compatible with CS SYSTEM, accent ring optionally brass, gold, black or white

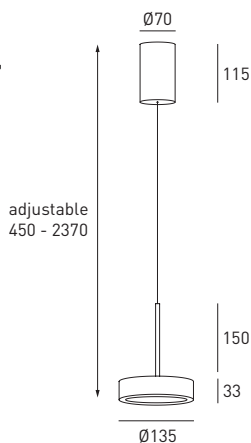

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
⓪ D2050	SOLANA	white/white	1x11W LED □ 2700K	1850 lm	incl. driver phase dim
⓪ D2051	SOLANA	white/black	1x11W LED □ 2700K	1850 lm	incl. driver phase dim
⓪ D2052	SOLANA	white/gold	1x11W LED □ 2700K	1850 lm	incl. driver phase dim
● D2053	SOLANA	black/black	1x11W LED □ 2700K	1850 lm	incl. driver phase dim
● D2054	SOLANA	black/gold	1x11W LED □ 2700K	1850 lm	incl. driver phase dim
● D2058	SOLANA	royal brass	1x11W LED □ 2700K	1850 lm	incl. driver phase dim
● D2039	SOLANA	royal brass/black	1x11W LED □ 2700K	1850 lm	incl. driver phase dim

COLOURS



white/white



white/black



white/gold



black/black



black/gold



royal brass



royal brass/black

TRACK Optional mit Global 1-Phasenadapter oder 3-Phasen-Universaladapter
Optionally with Global 1-phase adapter or 3-phase universal adapter


CODE	TYPE
Dxxxx-P1	Global 1-phase adapter
Dxxxx-P3	3-phase universal adapter



ELDORADO

LED-Wand- und Deckenleuchte 9 W, CRI>90, Farbtemperatur umschaltbar 2700K/3000K/4000K, mit Glasdiffusor, wählbar in drei Varianten, mit eingebautem Driver 230 V, dimmbar mit Phasenabschrittdimmer, Gehäuse aus Aluminiumdruckguss mit zusätzlicher seitlicher Einspeisemöglichkeit, kompatibel mit CS SYSTEM, für den Innen- und Außenbereich verwendbar, IP65

LED-wall and ceiling luminaire 9 W, CRI>90, colour temperature switchable 2700K/3000K/4000K, with acryl glass diffuser, selectable in three versions, with built-in driver 230V, trailing edge dimmable, housing made of die-cast aluminium with an additional side feed-in option, compatible with CS SYSTEM, to be used in indoor and outdoor areas, IP65



CRI>90



IP65

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
① D2500	ELDORADO C	white/glass c	9W LED ■ CCT switch 2700K/3000K/4000K	1035 lm	incl. driver phase dim
● D2501	ELDORADO C	black/glass c	9W LED ■ CCT switch 2700K/3000K/4000K	1035 lm	incl. driver phase dim
① D2502	ELDORADO R	white/glass r	9W LED ■ CCT switch 2700K/3000K/4000K	1035 lm	incl. driver phase dim
● D2503	ELDORADO R	black/glass r	9W LED ■ CCT switch 2700K/3000K/4000K	1035 lm	incl. driver phase dim
① D2504	ELDORADO MP	white/glass mp	9W LED ■ CCT switch 2700K/3000K/4000K	1035 lm	incl. driver phase dim
● D2505	ELDORADO MP	black/glass mp	9W LED ■ CCT switch 2700K/3000K/4000K	1035 lm	incl. driver phase dim

Farbtemperatur umschaltbar / colour temperature switchable







PISA

LED-Stableuchte 2,1 W, CRI>90, Gehäuse aus Aluminium, mit satiniertem Acrylglaszylinder, inklusive Erdspieß und 2,5 m Gummischlauchleitung H05RN-F, 3x0,75mm², Driver bitte separat bestellen, IP65

LED-stem luminaire 2,1 W, CRI>90, housing made of aluminium, with satined acrylic glass cylinder, including ground spike and 2,5 m rubber insulated cable H05RN-F, 3x0,75mm², please order driver separately, IP65

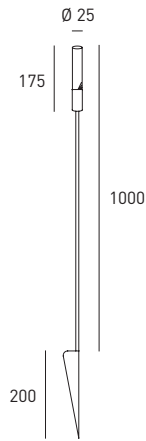


CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
● D2553	PISA	black	1x2,1W LED □ 2700K 24 Vdc	180 lm	excl. driver
● D718	PISA	black	1x2,1W LED □ 3000K 24 Vdc	180 lm	excl. driver



POLO

LED-Stableuchte 2,1 W, CRI>90, Gehäuse aus Aluminium, mit satiniertes Acrylglaskugel, inklusive Erdspeiß und 2,5 m Gummischlauchleitung H05RN-F, 3x0,75mm², Driver bitte separat bestellen, IP65

LED-stem luminaire 2,1 W, CRI>90, housing made of aluminium, with satined acrylic glass sphere, including ground spike and 2,5 m rubber insulated cable H05RN-F, 3x0,75mm², please order driver separately, IP65

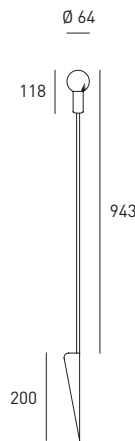

CODE	TYPE	COLOUR	LAMP	LUMEN*	POWER SUPPLY
● D2554	POLO	black	1x2,1W LED □ 2700K 24 Vdc	180 lm	excl. driver
● D2555	POLO	black	1x2,1W LED □ 3000K 24 Vdc	180 lm	excl. driver


DRIVER

CODE	TYPE	POWER	CONSTANT VOLTAGE	LxWxH	IP CODE	USE OF DRIVER
CV-24-18-IP67	DRIVER IP67	1,0 - 18,0 W	24 Vdc	162x37x25 mm	IP67	1-8 luminaires

ACCESSORIES

Kleinstverteilerdose IP68, für max. 1 Leuchte (2 Kabelausslässe von Ø 5 mm bis Ø 12 mm), 3-polig mit Klemme


Micro junction box IP68, for maximum 1 luminaire (2 cable outlets from Ø 5 mm to Ø 12 mm), 3-pin with terminal



CODE	TYPE	COLOUR
● D161	MICRO JUNCTION BOX IP68 - II	black

Kleinstverteilerdose IP68, für max. 3 Leuchten (4 Kabelausslässe von Ø 5 mm bis Ø 12 mm), 3-polig mit Klemme

Micro junction box IP68, for maximum 3 luminaires (4 cable outlets from Ø 5 mm to Ø 12 mm), 3-pin with terminal



CODE	TYPE	COLOUR
● D162	MICRO JUNCTION BOX IP68 - IV	black



Ein Produkt von / a product of

EGGER Licht GmbH

Obere Tiebelgasse 7 - 9560 Feldkirchen, Austria

Tel +43 (0) 4276 55 07

office@dslighting.com

www.dslighting.com